



HOBO UX90 State Logger - UX90-001M

Supported Measurements:

Event, Kilowatt Hours (kWh), Motor On/Off, Pulse Input, Runtime, State Open/Closed, Water Flow

One logger with 4 recording modes

Internal reed switch can be used to determine when a door or window is open or closed

Compatible with a wide range of external sensors

Replacement for: H06-001-02, U9-001

Internal Sensor

Maximum State, Event, Runtime Frequency: 1 Hz

Preferred Switch State: No magnet present (normally open)

External Input

External Contact Input: Electronic solid state switch closure or logic driven voltage output

Range: 0 to 3 V DC (USB powered), 0 to 2.5 V DC (battery powered)

Maximum Pulse Frequency: 50 Hz

Maximum State, Event, Runtime Frequency: 1 Hz

Pulse, Event Lockout Time: 0 to 1 second in 100 ms steps

Solid State Switch Closure: Input Low: < 10 K Ω ; **Input High:** > 500 K Ω

Internal Weak Pull-Up: 100 K Ω


Input Impedance: Solid state switch closure: 100 K Ω pull up

Logger

Resolution: Pulse: 1 pulse, Runtime: 1 second, State and Event: 1 State or Event

Logging Rate: 1 second to 18 hours, 12 minutes, 15 seconds

Time

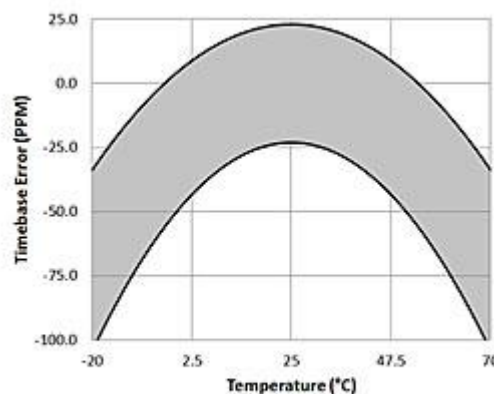

Plot A: Time Accuracy

Accuracy: ± 1 minute per month at 25°C (77°F) (see Plot A)

Battery Life: 1 year, typical with logging intervals greater than 1 minute and normally open contacts

Memory:

UX90-001: 128 KB (84,650 measurements, maximum)
UX90-001M: 512 KB (346,795 measurements, maximum)

Download Type: USB 2.0 interface

Download Time: 10 seconds for 128 KB; 30 seconds for 512 KB

Logger Operating Range:

Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing)

Launch/Readout: 0° to 50°C (32° to 122°F) per USB specification

LCD: LCD is visible from: 0° to 50°C (32° to 122°F); the LCD may react slowly or go blank in temperatures outside this range

Size: 3.66 x 5.94 x 1.52 cm (1.44 x 2.34 x 0.6 in.)

Weight: 23 g (0.81 oz)

Environmental Rating: IP50

CE - The CE Marking identifies this product as complying with all relevant directives in the European Union (EU)

Tempcon Instrumentation Ltd.
Unit 19, Ford Lane Business Park, Ford Lane
Ford, Nr. Arundel, West Sussex. BN18 0UZ
Tel: +44 (0) 1243 558270 Fax: +44 (0) 1243 558288

Email: info@tempcon.co.uk
Web site: www.tempcon.co.uk