



HOBO UX90 Room Occupancy/Light Logger - UX90-006M

Occupancy Sensor

Detection Range: UX90-006x: maximum 12 m (39.4 ft)


Detection Performance:

UX90-006x: 102° (±51°) Horizontal; 92° (±46°) Vertical (see Figure B)

Detection Zones:

UX90-006x: 64 (see Figure B)

Figure B: UX90-006 Detection Area

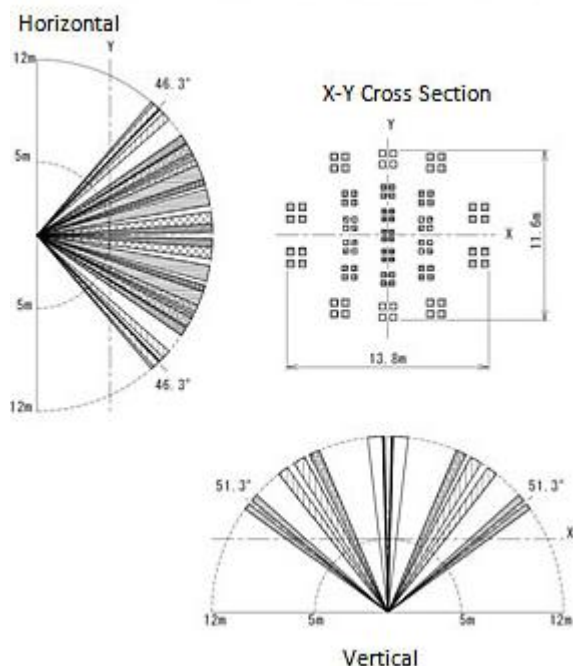


Light Sensor

Light Threshold: > 65 lux

Light Type: LED, CFL, fluorescent, HID, incandescent, natural

Time

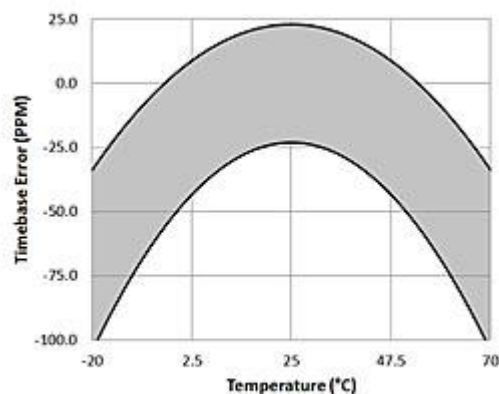

Plot A: Time Accuracy

Accuracy: ±1 minute per month at 25°C (77°F) (see Plot A)

Battery Life: 1 year typical use

Memory:

UX90-006M: 512 KB (346,795 measurements, maximum)

Download Type: USB 2.0 interface

Download Time: 30 seconds for 512 KB;

Logger Operating Range:

Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing)

Launch/Readout: 0° to 50°C (32° to 122°F) per USB specification

Occupancy Sensor Range: 20° to 60°C (-4° to 140°F); 15 to 85% RH (non-condensing)

LCD: LCD is visible from: 0° to 50°C (32° to 122°F); the LCD may react slowly or go blank in temperatures outside this range

Size:

UX90-06x: 3.66 x 8.48 x 2.87 cm (1.44 x 3.34 x 1.13 in.)

Weight: 30 g (1.06 oz)

Environmental Rating: IP50



- The CE Marking identifies this product as complying with all relevant directives in the European Union (EU)

Tempcon Instrumentation Ltd.
Unit 19, Ford Lane Business Park, Ford Lane
Ford, Nr. Arundel, West Sussex. BN18 0UZ
Tel: +44 (0) 1243 558270 Fax: +44 (0) 1243 558288

Email: info@tempcon.co.uk
Web site: www.tempcon.co.uk