



8080 1/8 DIN Dual Colour Indicator



- Large Five Digit Display
- Colour Change On Alarm
- Min/Max Value Hold
- 2 Process Alarms
- Security Lock
- Process Transmitter PSU
- PV retransmit option
- RS485 comms option



The West 8080 offers high accuracy temperature or process inputs. The custom-designed display is larger than other instruments of this size, and can be set to change colour to indicate alarm status.

Specification

Features

Output Configuration
Alarm Types
Viewable Values
Human Interface

Temperature Version

Input

Impedance
Accuracy
Sampling
Sensor Break Detection

Up to 3 total., max 2 for Alarms, max 1 for retransmission of PV
Process high, process low, direct acting, process high, process low reverse and logical OR
Process variable, alarm values, maximum value, minimum value and elapsed time since reset
4 button operation, 5 digit 18mm high colour change display, plus set-up and alarm indicators

J, K, R, S, T, B, & N Thermocouple, 3 or 4 Wire PT100, 50 per lead maximum (balanced)

>100M for Thermocouple
+/- 0.1% of input span +/- 1 LSD (T/C CJC better than 0.5°C)
4 per second, 14 bit resolution
<2 secs, all alarms activate

DC Process Version

Input
Scaling
Impedance
Accuracy
Sampling
Sensor Break Detection
Totalising of PV by Interval
Transmitter Power Supply

0-20/4-20/10-50mA, 0-5/1-5/0-10/2-10V, +/-100mV, +/-1V, +/-10V
-19999 to 99999, dec point as required. Up to 10 scaling points for non-linear applications
>100K for mV range, >950K for V ranges, 10 for 20mA ranges and 1 for 50mA range
+/- 0.01% of input span typical (+/- 0.05% max) +/- 1 LSD
10 per second, 14 bit resolution
<2 secs (except zero based ranges), all alarms activate
Seconds, minutes or hours
20-28V DC (24V nominal), max load 910 (22mA at 20V). Fitted as standard

Outputs & Options

Alarm 1

Alarm 2


Retransmit Output
Digital Input
Communications

Open collector NPN transistor (30VDC 100 mA max) and relay (Contacts SPDT 3Amp resistive at 240VAC/5Amp at 110V), latching or non-latching. Fitted as standard.
Open collector NPN transistor (30VDC 100mA max) fitted as standard. Optional relay (Contacts SPDT 2Amp resistive at 240VAC/5Amp at 110V), non-latching
0-20/4-20mA into 500 max, 0-10/0-5V into 500 min. Accuracy typically +/- 0.25% 250mS update
External security lock (also Tare function on Process Version). Volt free or TTL compatible
2 wire RS485, 1200 to 9600 baud. ASCII protocol


Operating and Environmental

Temperature & RH	0 to 55°C (-20 to 80°C storage), 20% to 95%RH non-condensing
Power Supply	100 to 240V 50/60Hz 7.5VA (optional 20 to 50V AC 7.5VA/22 to 55V DC 5W)
Front Panel Protection	IEC IP66 (Behind panel protection is IP20)
Approvals and Certification	CE, UL & UIC

Dimensions

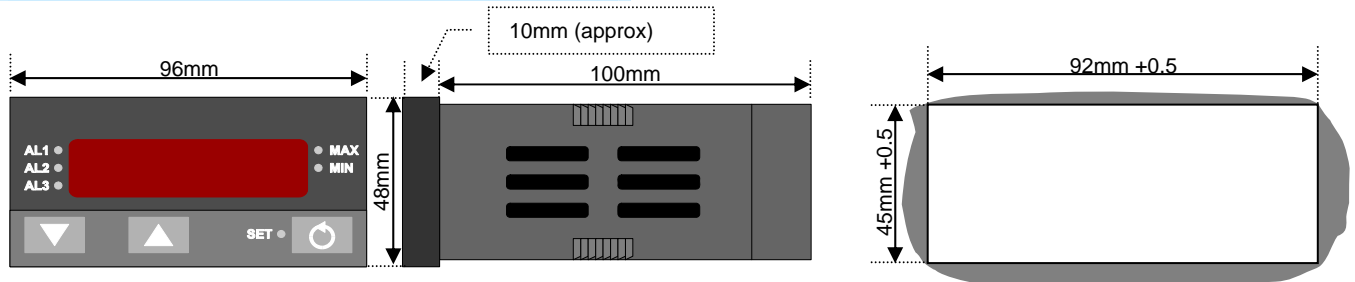

Connection Details

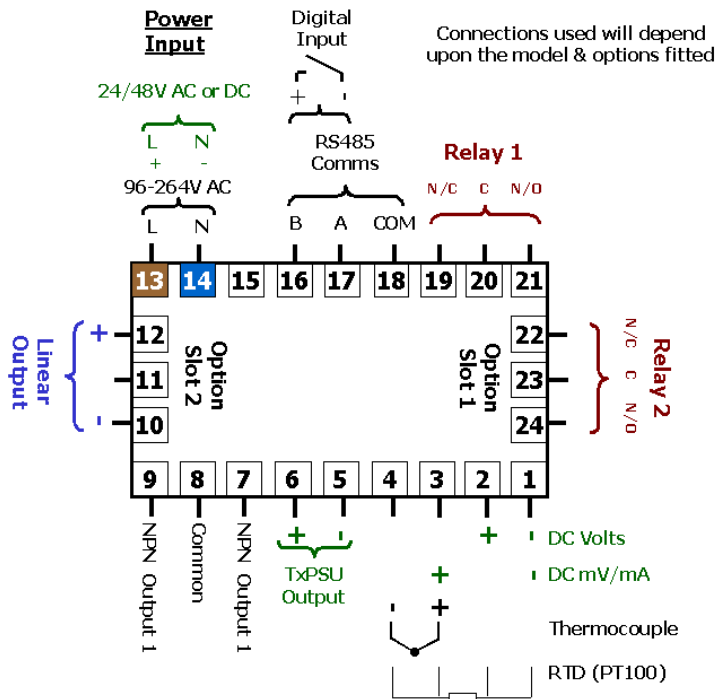

Field Reconfiguration

Input

Temperature Version – Configurable for probe type and range
Process Version – Configurable for signal type and range

Relay 1

Type is fixed as Alarm 1

Option Slot 1

Configurable as Alarm 2 via plug-in relay module


Option Slot 2

Configurable as Analogue DC Re-Transmit of PV using plug-in module

Option Slot 3

Temperature Version – Configurable for RS485 comms or Security Lock, via plug-in modules
Process Version – Configurable for RS485 comms or Tare/Security Lock, via plug-in modules

Ordering Code

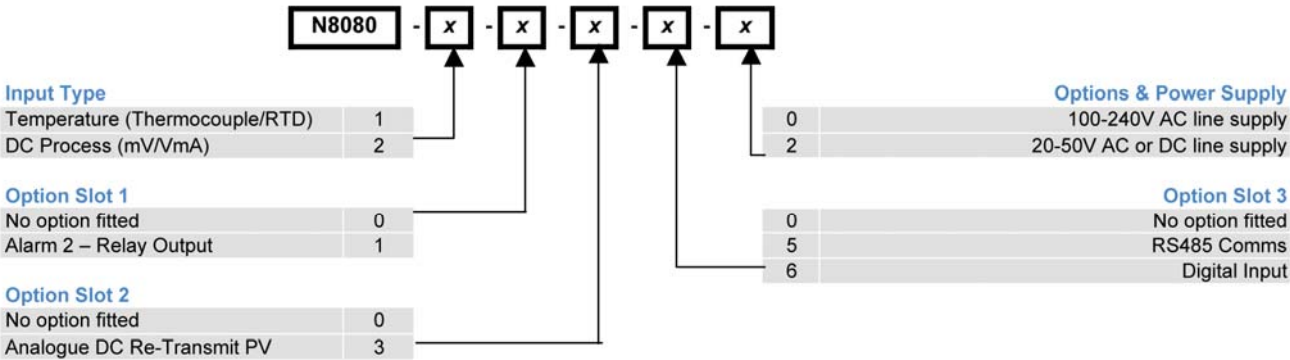



Official UK Suppliers & Stockists of:



Temperature & Process Input Controllers

- Single Loop Controllers
- Multi-Loop Controllers
- Programmable Controllers
- Valve Motor Drive Controllers
- Process Indicators

Please contact our sales and service teams at the following address for further product information.



Tempcon Instrumentation Ltd.
Unit 19, Ford Lane Business Park, Ford Lane
Ford, Nr. Arundel, West Sussex. BN18 0UZ
Tel: ++44 (0) 1243 558270 Fax: ++44 (0) 1243 558288
Email: info@tempcon.co.uk Web site: www.tempcon.co.uk

H215
0710