




---

# Fabricated Thermocouple Sensor - Type N / Crimp Seal with PFA Lead

## Product Images

---

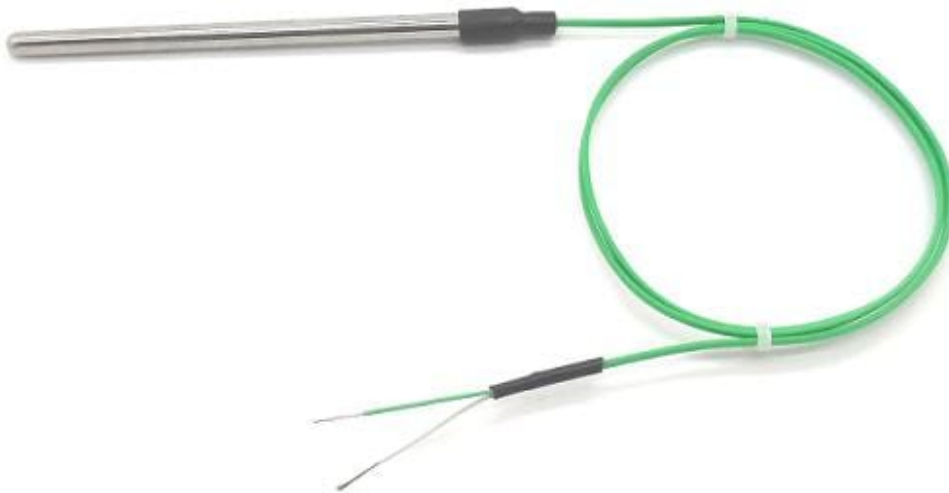


## Description

---

*Note: Type K Thermocouple shown for illustration only*

General purpose Fabricated Thermocouple Sensors available in Type N.

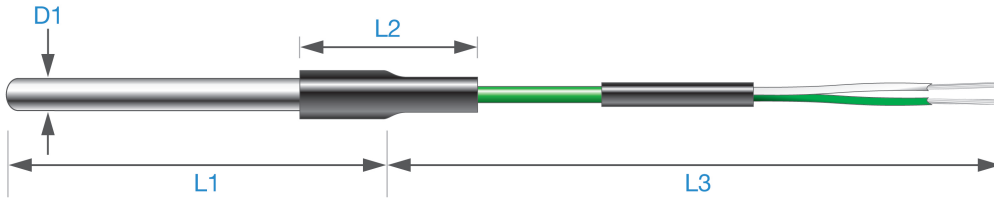

**D1: Probe Diameter**  
L2: Heat Shrink (20mm)

**L1: Probe Length**  
L3: Extension Cable (1m)

Material sheath 316 stainless steel probe with crimp end seal and fitted with PVC heat shrink for sealing and strain relief. The sensor is supplied with **1 metre of PFA Insulated lead**. A range of accessories including extension cables, connectors, pockets, thermowells and adjustable compression fittings are available for this product.

Accuracy to IEC 60584.1 2013 Class 2 (Class 1 also available)

IEC 60584.3 2008 colour coded extension cables and connectors

In House Calibration Service is also available

Bespoke designs available upon request

## Additional Information

Country of Manufacture	United Kingdom
Maximum Temperature	N
Extension Cable Insulation	PFA, 7/0.2mm
Heat Shrink Material	PVC 20mm (+110
Maximum Temperature Probe	260
Metal Sheath Material	316 Stainless Steel
Probe Diameter	3.0mm, 4.5mm, 6.0mm
Sensing Junction Material	Insulated (isolated), Simplex
Termination	Bare Tails

## Product Options

---

Diameter:	4.5 mm
	6.0 mm
	3.0 mm
Length:	200 mm Length (L1)
	150 mm Length (L1)
	100 mm Length (L1)
	50 mm Length (L1)
	300 mm Length (L1)
	250 mm Length (L1)