




# DISCONTINUED: Dickson TSB Touchscreen Data Logger (USB)

## Product Images

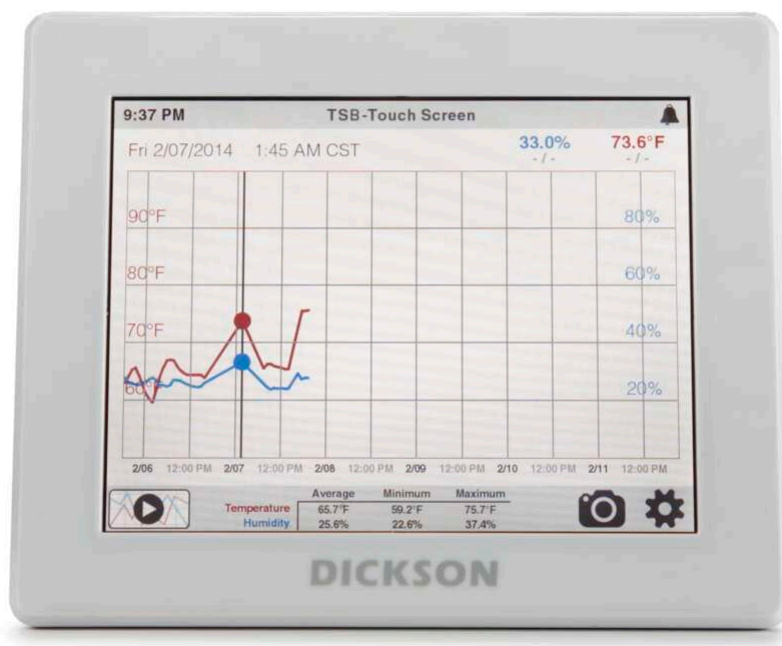

## Short Description

Dickson have created a device that is feature heavy, easy to use, and allows users to access their data history anywhere. The Dickson TSB enables you to log temperature and humidity using the replaceable sensors.

## Description

---

Dickson have created a device that is feature-rich, easy to use, and allows users to access their data history anywhere. The Dickson TSB Touchscreen Data Logger enables you to log temperature, humidity or differential pressure using the replaceable sensors.

### **TSB Key Features**

- Capacitive Touch LCD screen
- USB Data Download
- Interchangeable Replaceable Sensors
- User-selectable Sample Rate
- Customisable Alarms.

Explanation	<p><b>Specifications</b></p> <p><b>Alarm Type</b> Audible/Visual</p> <p><b>Ambient Operating RH Conditions</b> 0 to 95% RH non-condensing (Logger Only)</p> <p><b>Ambient Operating Temperature Conditions</b> 14 to 140F (-10 to 60C)</p> <p><b>Antenna Type</b> Internal</p> <p><b>Approvals</b> CE</p> <p><b>Battery Backup</b> 100+ Hours</p> <p><b>Battery Type</b> Rechargeable Backup Battery</p> <p><b>Calibration Options</b> N100, N300, N400, N995</p> <p><b>Data Capacity</b> Approx 1,000,000 sample points (backup)</p> <p><b>Dimensions</b> 8.5 x 1.75 x 7" (21 x 4.5 x 18cm)</p> <p><b>Display Dimensions</b> 8" Diagonal</p> <p><b>Display Type</b> LCD Touchscreen</p> <p><b>Display Update Rate</b> Sample Interval Dependent (User Selectable)</p> <p><b>Download Type</b> USB</p> <p><b>Enclosure</b> Case Front: Polycarbonate; Case Back and Pods; ABS</p> <p><b>Included Accessories</b> AC Adapter, Replaceable Sensor(s), Mounting Bracket</p> <p><b>Mounting Options</b> Mounting Bracket (Included with Touchscreen)</p> <p><b>PC Requirements</b> Windows 7 or more recent</p> <p><b>Power Cord</b> 6 ft</p> <p><b>Power Source</b> 100-240 VAC 50/60Hz 12V=1A</p> <p><b>Required Software</b> DicksonWare VERSION TBD</p> <p><b>Resolution</b> LCD TBD</p> <p><b>Sample Interval</b> User selectable on device and in DicksonOne (60 seconds, 90 seconds, 2 minutes, 5 minutes, 10 minutes, 15 minutes, 30 minutes, 1 hour)</p> <p><b>Sensor Type</b> Replaceable Sensor (See Accessories for more information)</p> <p><b>Unit Weight</b> 1.45lbs</p> <p><b>Units/Pkg</b> 1</p> <p><b>Warranty</b> 12-month</p>
Promotion	<p><b>This product has been discontinued. See the <a href="#">TWE Touchscreen Data Logger</a></b></p>
Brand	Dickson
Typical applications	Environmental (Indoor)
Measurements	Differential Pressure, Humidity, Temperature

<b>Replaceable Sensor Options</b>	RTMP Ambient Temperature Sensor
	RTRH-R Temperature & Humidity Sensor
	RS080 Differential Pressure Sensor (2")
	RS081 Differential Pressure Sensor (0.5")
	RTD Sensor
	RKTC K-Thermocouple Sensor
<b>Temperature Calibration Certificate</b>	RTHM Glycol Thermistor Sensor
	2 Point Temperature Calibration (0°C / 60°C)
	2 Point Temperature Calibration (please specify temperature points)
<b>Temperature &amp; Humidity Calibration Certificate</b>	1 Point Temperature Calibration (0°C)
	Temperature & Humidity Calibration @ 20°C and 50RH
	Temperature & Humidity Calibration (please specify measurement points required)