


Call our friendly team on +44 (0)1243 558270 Tempcon Instrumentation Ford Lane Business Park Ford West Sussex BN18 OUZ, UK www.tempcon.co.uk



Dickson RKTC K-Thermocouple Sensor

Product Images

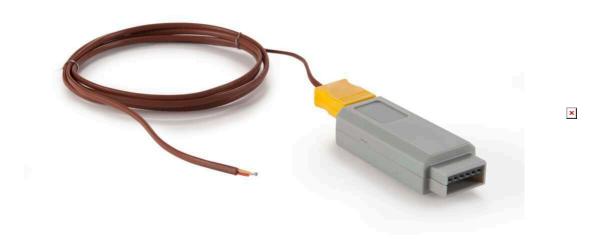

Short Description

Dickson's new line of Touchscreen Replaceable Sensors allow you to monitor temperature how you want, and calibrate how you want. When your instrument is due for calibration, simply order the appropriate Replaceable Sensor with the type of calibration you need. When you receive a new sensor in the mail, detach the old one, replace it with the new one, and then . . . you're done!

Description

Dickson's new line of Touchscreen Replaceable Sensors allow you to monitor temperature how you want, and calibrate how you want. When your instrument is due for calibration, simply order the appropriate Replaceable Sensor with the type of calibration you need. When you receive a new sensor in the mail, detach the old one, replace it with the new one, and then . . . you're done!

The RKTC is intended for use with the following DicksonOne data loggers: TSB, TWE, TWP, DWE.

Note ANSI colour coding is shown, please advise if you require IC European Coding.

Explanation	Specifications Temperature Accuracy +/-1.8F from -22 to 122F (+/-1C from -30 to 50C) Temperature Range -300 to 2000F (-184 to 1093C) Temperature Accuracy (Remainder of Range) +/-3.8 (2.1C)
Brand	Dickson
Measurements	Temperature

Additional Options

Temperature Calibration Certificate	2 Point Temperature Calibration (0°C / 60°C)
	2 Point Temperature Calibration (please specify temperature points)
	1 Point Temperature Calibration (0°C)