


Call our friendly team on +44 (0)1243 558270 Tempcon Instrumentation Ford Lane Business Park Ford West Sussex BN18 0UZ, UK www.tempcon.co.uk



# DISCONTINUED: Remote Fridge/Freezer Temperature Monitoring System for Retail Food & Beverage

### **Product Images**

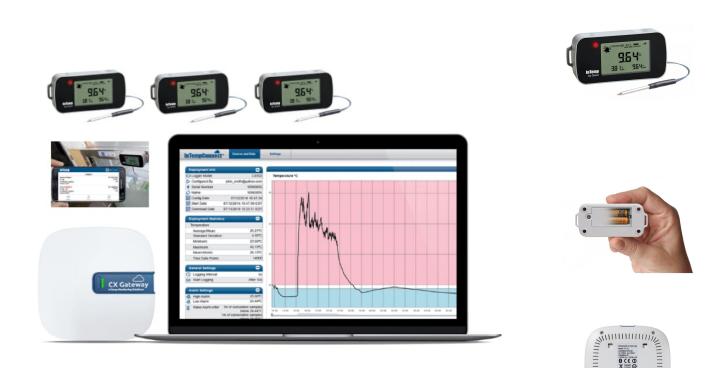





### Short Description

The ideal 24/7 remote system to monitor temperatures in food fridges for retailers such as restaurants, cafés and delicatessens.

### Description

**Plug & Play Wireless Fridge & Freezer Temperature Monitoring.** The affordable, expandable refrigerator temperature monitoring system that provides food & beverage retailers with 24/7 remote temperature monitoring and alert notifications sent via text message or email.

Simply place each of the three included Bluetooth temperature data loggers outside a fridge/freezer with the attached external temperature probes inserted inside the fridges. View temperature data at any time without opening the fridge door on the data logger's LCD screen, the InTemp mobile app, or online on your dashboard on the InTempConnect cloud-based platform.

**Failures in refrigeration equipment can have costly repercussions if undetected.** Consider the value of your regular stock and then value of stock during busy seasons. Prevent damage to stock occurring in the first place with a temperature monitoring and alarm system that automatically operates 24/7, informing you in and outside of working hours should refrigeration failure occur.

### Key Benefits of the Wireless Fridge Monitor System

- Temperture alert notifications sent via text message or email
- Assists with HACCP compliance
- Reduces product waste
- Eliminates time spent taking manual readings
- Alleviates audit stress with easy to access historical reports.

#### If your refrigeration units fail, in or outside working hours - do you get notified?

Drift	<0.1°C (0.18°F) per year
Response Time	With 5 mL bottle: 10 minutes typical to 90% in air moving 1 m/s With 15 mL bottle: 20 minutes typical to 90% in air moving 1 m/s With 30 mL bottle: 25 minutes typical to 90% in air moving 1 m/s
Cable Length	2 or 4 metre (6.56 or 13.12 feet) flat ribbon cable

#### Ambient Temperature Sensor (built into CX402-T2M)

Range	-30° to 70°C (-22° to 158°F)
Accuracy	±0.5°C from -15° to 70°C (±0.9°F from 5° to 158°F) ±1.0°C from -30° to -15°C (±1.8°F from -22° to 5°F)
Resolution	0.024°C at 25°C (0.04°F at 77°F)
Drift	<0.1°C (0.18°F) per year
Response Time	15 minutes typical to 90% in air moving 1 m/s

## CX5000 Internet Gateway (links your InTemp data loggers seamlessly to the InTempConnect cloud-based data platform)

Transmission Range	Approximately 30.5 m (100 ft) line-of-sight
Wireless Data Standard	Bluetooth 4.2 (BLE)
Connectivity	WiFi 802.11a/b/g/n 2.4/5 GHz or 10/100 Ethernet
Power Source	AC adapter
Dimensions	12.4 x 12.4 x 2.87 cm
Weight	137 g
CE	The CE Marking identifies this product as complying with all relevant directives in the European Union (EU).

### InTemp Wireless Fridge Fridge/Freezer Kit for Retail Food & Beverage Contains

Contents	<ul> <li>3 x CX402-T2M Temperature Data Loggers with LCD display (complete with AAA user-replaceable batteries)</li> <li>1 x CX5000 Internet Gateway &amp; power adaptor</li> <li>1 x free InTemp app and InTempConnect cloud server registration.</li> </ul>
Ideal For	Professional
Promotion	This product has been superseded by the SKU: InTemp-Food-Fridge- Temp-Kit-Bundle
Brand	Onset InTemp
Typical applications	Food Safety
Measurements	Temperature

## **Additional Options**

CX Gateway Service Plan (one required per CX Gateway)

Add Additional Temperature Data Loggers if More Than Three are Required CX Gateway Service Plan - One Year Subscription (SKU: SP-CXGTW)

CX402-T2M Temperature Logger